



Per land time the transfer of the transfer of

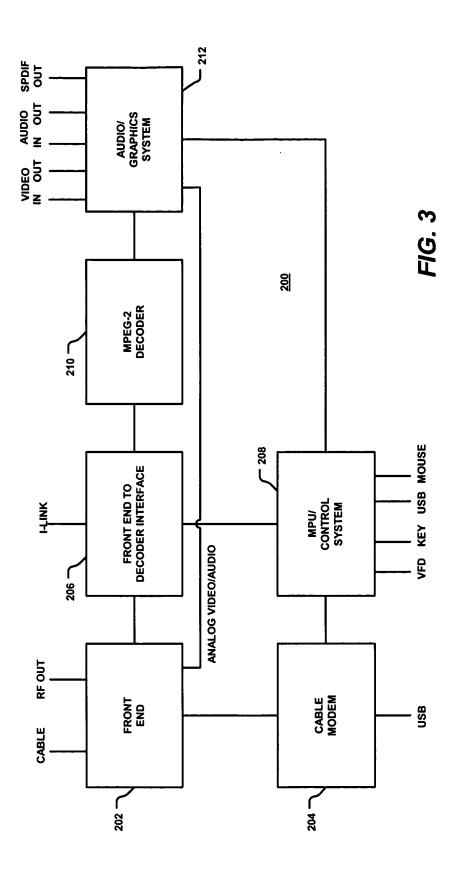


SPDIFout Video out Audio out Audio: in USB "A" Video:in Ext, SDRAM (4Mx16)x2 (2Mx32)x1 (8Mx8)x4 16MB SDRAM SDRAM 32MB 8MB Codec/MIX Video Encoder **AK4543 ASAHI** Rage Theater 82C86: USB OPTi /Decoder **Z12** ATI SDRAM bus Graphics Rage XL ATI MIDI/AUDIO PCI bus UART YAMAHA **YMF754 Bus Bridge** MIPS MPU VRC5476 VR5432 NEC MIPS bus RTL8029AS 요 한 한 ξĮ Ethernet **DD Decoder** (1Mx16)x1C-Cube CL9302 MPEG-2 SDRAM Bus Bridge 2MB Local-68K CXD9574 Flash Mem (8Mx8)x2 **16MB** Smart CARD ocal bus ... ∠ 012 CARD 1/F Philips TDA8004 , SIO, SIO (4Mx16)x1 Processor Network CL9311 SDRAM C-Cube 8MB Ext, Flash Mem uPD753106 SIRCS, User I/F MPU MITSUBISHI (8Mx8)x2 VFD Driver CARD I/F Philips TDA8004 16MB BOOT ROM 512KB Affinity CARD M66004 AT49LV040 CXD3204 i LINK SONY LINK Mouse KEY Analog Video/Audio Ĭ. OOB ATM Ethernet 12C Ctrl - 68K BUS USB "B' DVB comn SONY CXD1959 DES E.C.B Flash Memory Ethernet - 902 PHY 4MB SRAM 32KB Demod/FEC Broadcom BCM3125 demodulator VIF/SIF Analog SONY QAM $(4M\times16)\times1$ Processor Function CN9414 204 SDRAM Multi 8MB SIO Panasonic 202 OOB Tuner Up Stream Combiner **008-022** In Band **OOB-002** CT-10 Tuner **TOKO TOKO** Panasonic **Temic Tuner ENC16914** RF Mod ENPE63: DSM Pana ㅎ 쓔┫ Š


208

FIG. 5

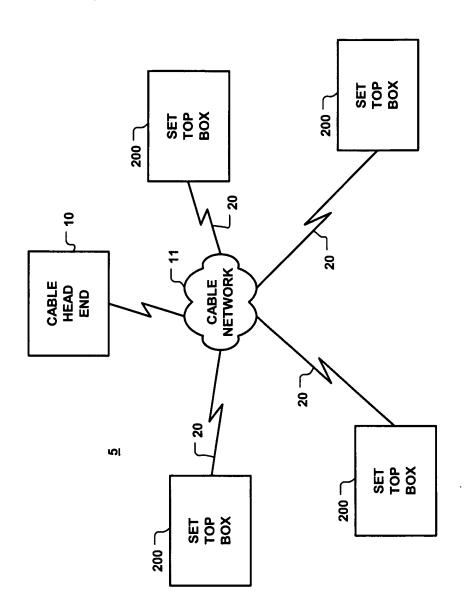

F/G. 6

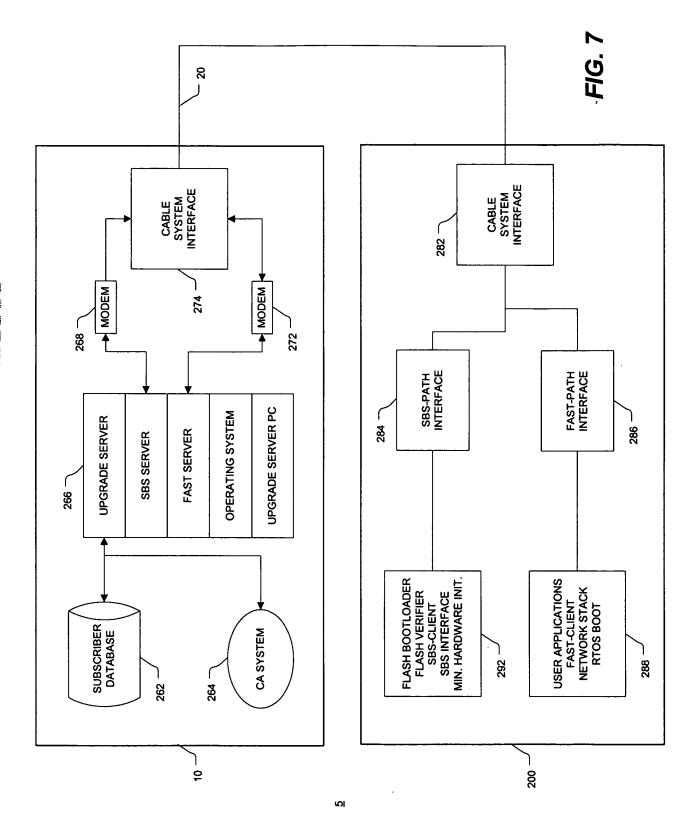

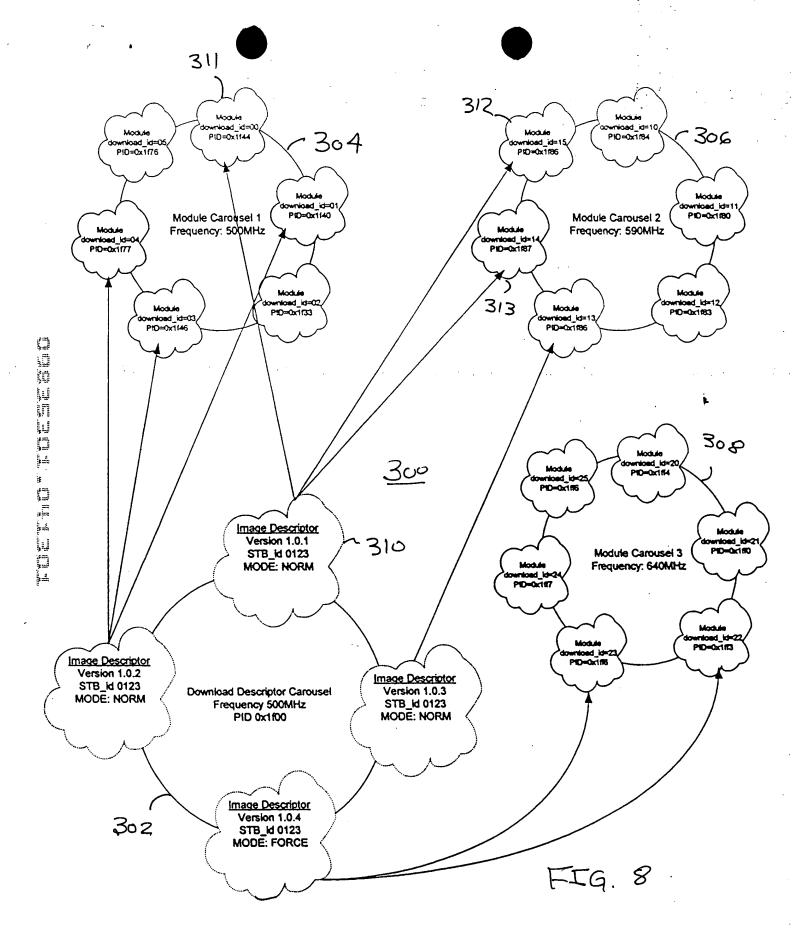

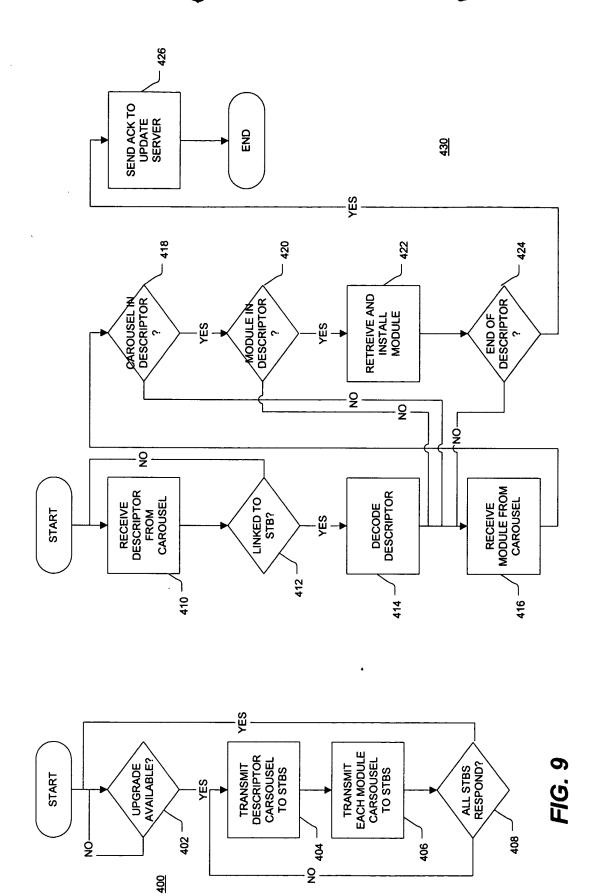


FIG. 10